





X-BT-MR0 M10/W10/ 15 SN 8 V3

















2488368-2026.02.11

CE
21
Hilti AG LI-9494 Schaan
Hilti-DX-DoP-008
ETA-20/1042
EAD 333037-00-0602
0672
0672-CPR-0934
Threaded studs for connection of materials to structural steel

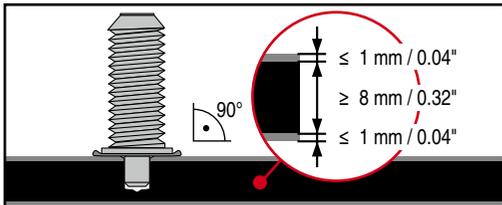
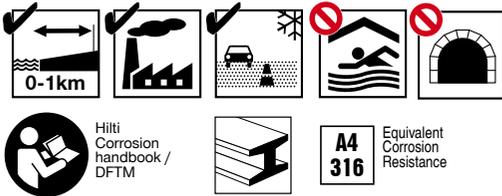


Use with					
X-BT-MR0 W10/15 SN 8 V3	SBT 6 SF BT 22-A SF BT 18-A	DX 351-BT	X-BT 1/4" 20Nm/ 14.8 ft lb	Flange Nut W10	S-NS 9/16 C 95/3 3/4"
X-BT-MR0 M10/15 SN 8 V3			S-M NU-FL-M10 A4	S-NS 15C 95/3 3/4"	X-IG BT M10

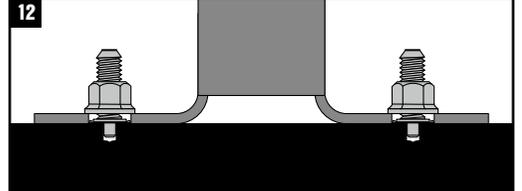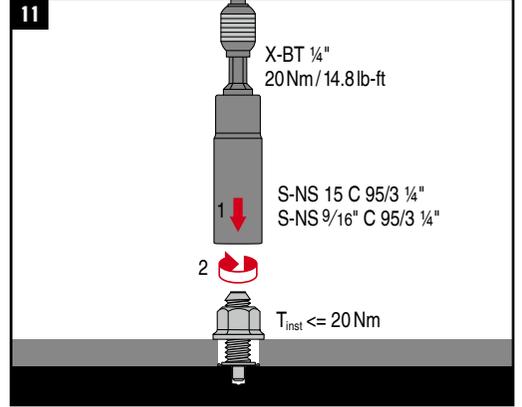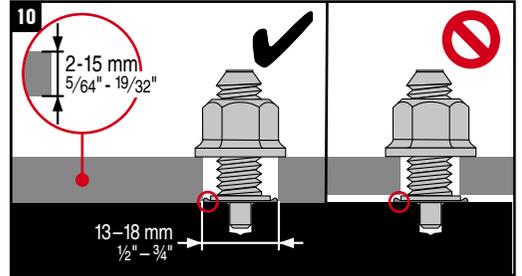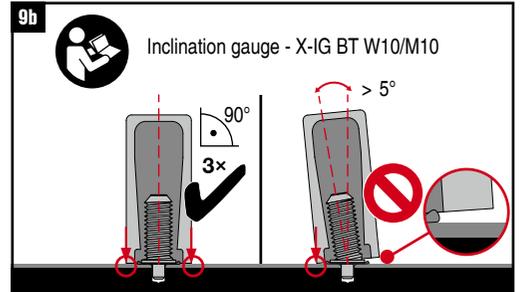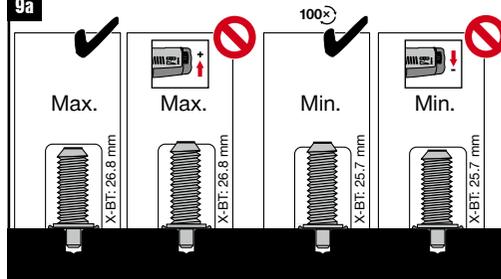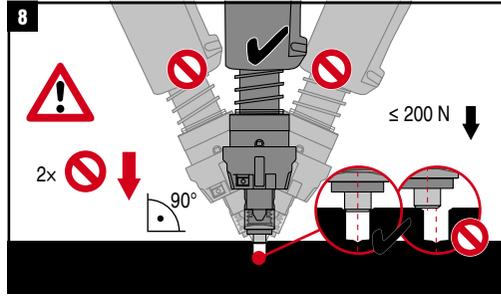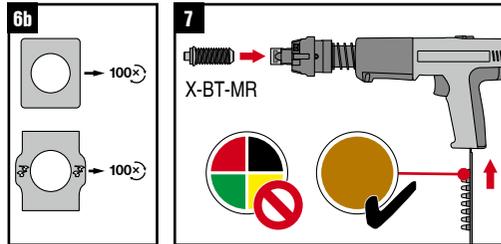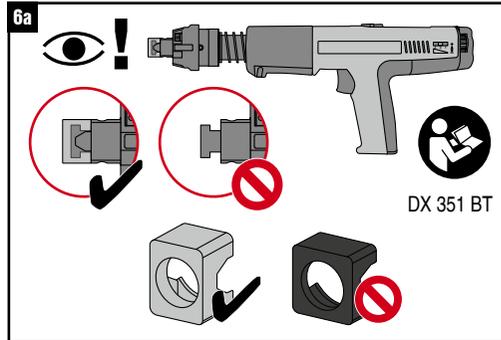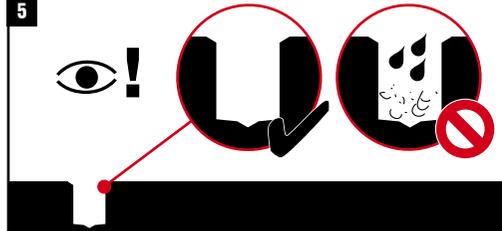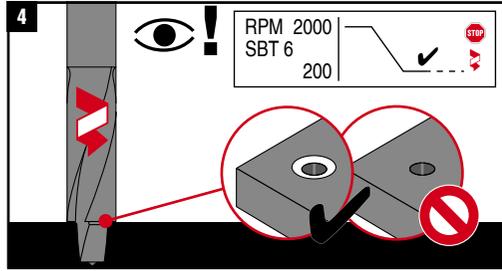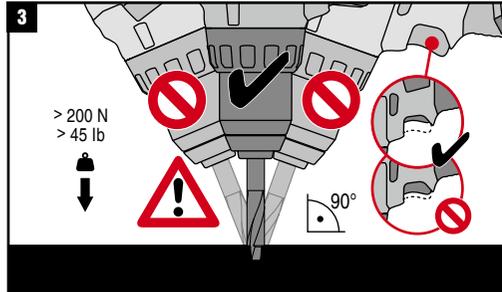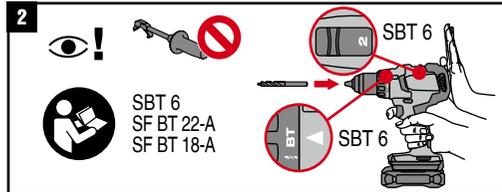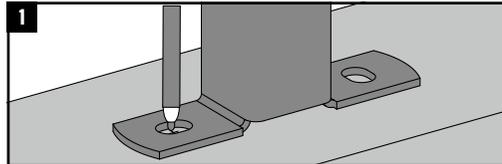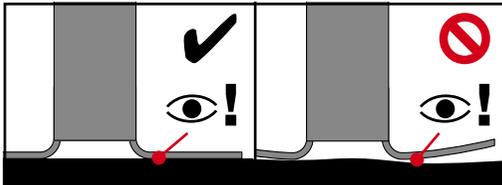

2488368-2026.02.11

CE
21
Hilti AG LI-9494 Schaan
Hilti-DX-DoP-008
ETA-20/1042
EAD 333037-00-0602
0672
0672-CPR-0934
Threaded studs for connection of materials to structural steel

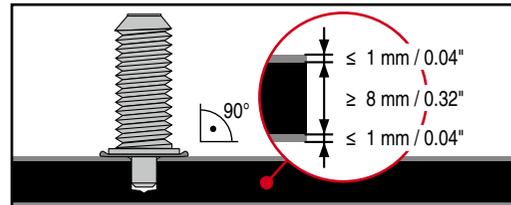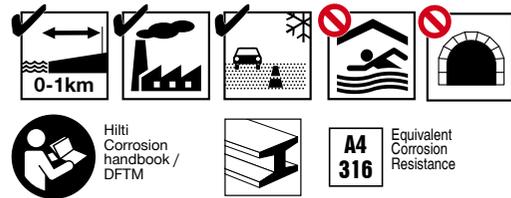

Use with					
X-BT-MR0 W10/15 SN 8 V3	✓				
X-BT-MR0 M10/15 SN 8 V3					

